


Avionics Mounting Devices


ARINC 408A Vertical Scale, 1" Deep.

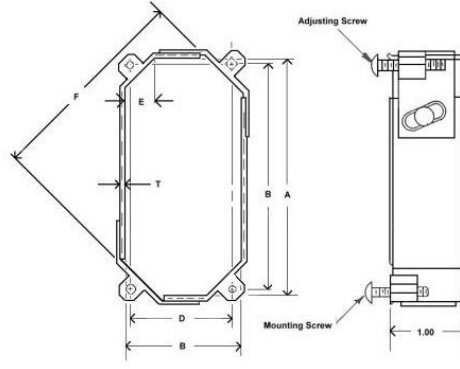

AMI P/N	Equivalent P/N	ARINC 408A Size	A	B	C	D	E	F	T	MOUNTING SCREW	ADJUSTING SCREW	FINISH
			±.015	±.015	±.005	±.005	±.010	REF.	±.003			
3911005	64320B, MGB64330, 139-3023-101	½-4ATI-R	3.975	1.795	3.860	1.680	0.428	3.476	0.040	MS35214-29	MS35214-46	Note 1
3911015	64423B, 5340-01-484-4920, C15005	1.5X3ATI-R	3.175	1.457	3.060	1.340	0.428	2.670	0.045	MS35214-29	MS35214-46	Note 1
3911020	64324B, 5340-01-247-2212, MGB68508, 4000836-1, 6615-99-625-1967		2.781	2.250	2.719	2.188	0.406	3.058	0.040	MS35214-29	MS35214-31	Note 1
3911025	64302B, 852636, NSA934901-12, 5340-01-305-1537, MGB67039	2X4ATI-R	3.975	2.175	3.860	2.060	0.426	3.746	0.040	MS35214-29	MS35214-46	Note 1
3911035	64304B, 852368, MGB67038, NH1000112	3X4ATI-R	3.975	3.175	3.860	3.060	0.428	4.451	0.040	MS35214-29	MS35214-46	Note 1
3911040	64498B	4X5ATI-R	4.975	3.975	4.810	3.860	.476	5.655	.040	MS35214-44	MS35214-46	Note 1
3911045	64418B	1.5X4ATI-R	3.975	1.457	3.860	1.340	.428	3.236	.040	MS35214-29	MS35214-46	Note 1
3911055	64469	1.5X3ATI-R	3.175	1.457	3.060	1.340	.428	2.670	.045	MS35214-29	MS35214-46	Note 1

Notes:
 1: Anodized per MIL-A-8625, Type 2, Class 1, Clear.
 2: Anodized per MIL-A-8625, Type 1, Class 1, Clear.
 3: Chem-filmed per MIL-DTL-5541, Type 1, Class 1A, Yellow.
 4: Chem Film per MIL-DTL-5541, Type 2, Class 3, Clear
 5 Closing brackets are self-locking
 Recommended mounting and adjusting screw torque is 5-8 in. lb.
 All clamps are designed to meet the requirements of MIL-C-6818 and/or customer requirements.
 Band and closing bracket materials are 6061-T6 per QQ-A-200/8, or AQMS-QQ-A-250/11.
 Rivet materials are 2017 per QQ-A-225/5

ARINC 408A Vertical Scale, 2" Deep.

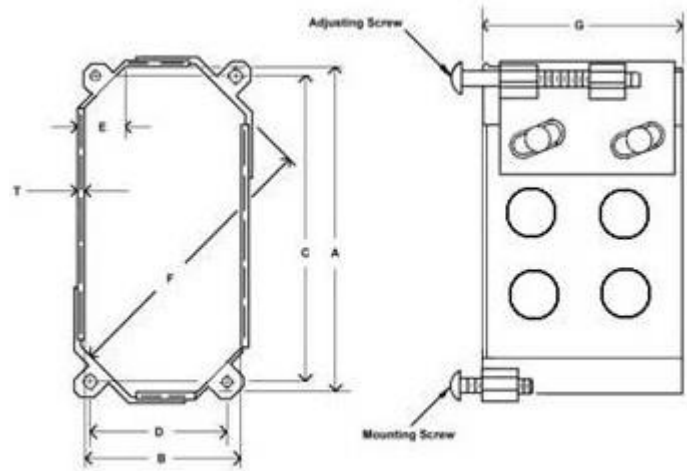

AMI P/N	Equivalent P/N	ARINC 408A SIZE	A	B	C	D	E	F	G	T	MOUNTING SCREW	ADJUSTING SCREW	FINISH
			±.015	±.015	±.005	±.005	±.010	REF.	±.03	±.003			
3921005	64428B, 5340-01-485-0277, 5340-01-307-2166	1.5X3ATI-R	3.175	1.457	3.060	1.340	.428	2.670	2.00	.045	MS35214-29	MS35214-50	Note 1
3921010	64429B, 5340-01-424-8323	1.5X4ATI-R	3.975	1.457	3.860	1.340	.428	3.236	2.00	.040	MS35214-29	MS35214-50	Note 1
3921015	64431B	3X4ATI-R	3.975	3.175	3.860	3.060	.428	4.451	2.00	.040	MS35214-29	MS35214-50	Note 1
3921030	64430B	2X4ATI-R	3.975	2.175	3.860	2.060	.426	3.746	2.00	.040	MS35214-29	MS35214-50	Note 1
3921035	64474	3X4ATI-R	3.975	3.175	3.860	3.060	.428	4.451	2.00	.040	MS35216-29	MS35216-50	Notes 1 & 5

Notes:
 1: Anodized per MIL-A-8625, Type 2, Class 1, Clear.
 2: Anodized per MIL-A-8625, Type 1, Class 1, Clear.
 3: Chem-filmed per MIL-DTL-5541, Type 1, Class 1A, Yellow.
 4: Chem Film per MIL-DTL-5541, Type 2, Class 3, Clear
 5 Closing brackets are self-locking
 Recommended mounting and adjusting screw torque is 6-10 in. lb.
 All clamps are designed to meet the requirements of MIL-C-6818 and/or customer requirements.
 Band and closing bracket materials are 6061-T6 per QQ-A-200/8, or AQMS-QQ-A-250/11.
 Rivet materials are 2017 per QQ-A-225/5